


ORION

Air cooled water chillers with centrifugal fans and heat pumps, featuring hermetic scroll compressors.



PURE ENERGY

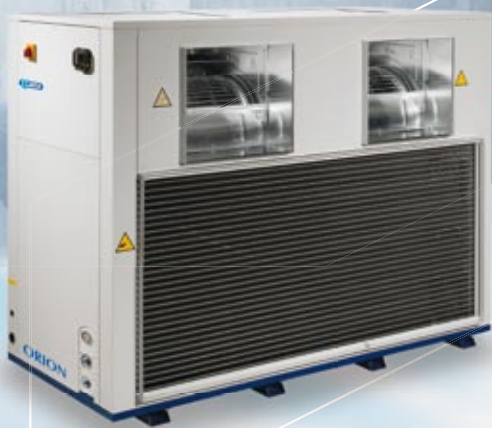

The Orion range of chillers and reversible heat pumps, featuring centrifugal fans, offer either single or, above 50 kW, tandem scroll compressors. Plate heat exchangers are applied and the pump and buffer tank are included within the package, to the benefit of installation and start-up.

Given that Orion is ideal within a multitude of architectural solutions care has been taken to offer complete flexibility without compromising performance. The fans allow both frontal and top air discharge, and the discharge direction can be modified within a matter of minutes, even on site, allowing modifications at any time. The variable speed belt/pulley configuration allows the static pressure and air flow to be adapted to the characteristics of the air ducting, eliminating noise and vibrations.



Cooling, conditioning, purifying.

BENEFITS

- High installation flexibility: direction of condensing air expulsion easily changed, even in site;
- Ideal for small hydronic air conditioning systems;
- Complete with storage tank and pump to facilitate installation and start-up operations;
- Designed for installation in confined spaces;
- High EER and COP values;
- Extended operating limits;
- Optimisation of heat pump defrosting cycles (HON) thanks to the exclusive Frost Detecting System;
- Self-adaptive temperature control logic SAC;
- Extremely quiet even without the use of sound-insulating devices;
- Easy to use thanks to an intuitive controller with dual icon-based display;
- Practical routine maintenance with easily accessible internal parts.

MAIN OPTIONS

- Layout without storage tank;
- High/low pressure head pump;
- Changing orientation of fans delivery port;
- Fans electronic speed control;
- Remote user interface;
- RS485 ModBus interface for connection to supervisor systems;
- xWEB300 for local or remote (GSM mobile phone) monitoring plus data filing based on WEB server technology;
- Antivibration mounts;
- Filters to protect the condenser coils;
- Phase monitor.

STANDARD FEATURES

- Hermetic scroll compressors (tandem dual compressor from model 211);
- Integral hydronic kit complete with centrifugal pump, tank, expansion vessel, relief valve, filling/drain valve, pressure gauge, and manual bleed valve;
- Hydraulic threaded connections directly accessible from the exterior of the unit;
- Brazed stainless steel plate evaporator;
- Centrifugal fans with fanwheel having forward-curved blades, double suction and belt-drive transmission with variable pitch pulley;
- Microprocessor controller with dual icon-based display;
- Panelling with internal condensate proof insulation;
- Condensate tray with threaded drain connection;
- Refrigerant charge, non-freezing oil, and factory testing;
- IP54 electric protection rating;
- Inspections and tests performed in factory as per all MTA products and components;
- Environmentally friendly refrigerants with R407C zero ozone depletion potential.

VERSIONS

- Chiller;
- Heat pump;
- Split chiller system in chiller mode or reversible heat pump.

Microprocessor controller with dual icon-based display



Higher efficiency and quieter operation thanks to scroll compressors



Built-in pumping module with or without storage tank



Condensing air expulsion easily changed, even in site



Model ON-HON		071	081	101	131	171	211	251	301	
ON	Cooling capacity	kW	17,1	21,1	28,8	37,3	43,6	50,1	57,1	66,6
	Absorbed power	kW	5,91	6,61	9,15	11,9	13,4	15,9	17,7	21,0
	Available static pressure	Pa	110	117	131	130	153	181	202	205
	ESEER	-	2,69	2,97	2,94	2,90	2,99	3,13	2,95	2,78
	IPLV	-	2,38	2,48	2,41	2,43	2,49	3,01	2,91	2,72
	Max external air temperature	°C	46	47	47	46	48	47	46	47
HON	Heating capacity	kW	19,8	23,5	31,2	42,1	49,2	57,1	63,7	74,7
	Absorbed power	kW	6,12	6,81	9,46	12,0	14,3	16,5	19,0	21,9
	Min. external air temperature	°C	-8	-6	-7	-8	-8	-8	-7	-6
Power supply	V/Ph/Hz	400±10%/3N/50								
Circuit / Compressors	N°	1/1	1/1	1/1	1/1	1/1	1/2	1/2	1/2	
Noise level	dB(A)	52,9	54,0	54,2	55,8	56,2	55,9	57,3	58,8	
Depth	mm	930	930	930	930	1081	1081	1081	1081	
Width	mm	1265	1265	1915	1915	2110	2110	2507	2507	
Height	mm	1444	1444	1444	1444	1900	1900	1900	1900	
Installed weight	Kg	225	258	350	377	672	731	877	907	

All data refers to standard units at the following nominal conditions:

Chiller: evaporator water inlet-outlet 12-7 °C, external air temperature 35 °C;

Heat pump: condenser water inlet-outlet 40-45 °C, external air temperature 7 °C dry bulb, 6 °C wet bulb.

Sound pressure level in hemispherical field at 10 m from condenser side and 1.6 m from ground with ducted air outlet. Values with tolerance ± 2 dB. The sound levels refer to operation of the unit under full load in nominal conditions and with circulation pump.



www.mta-it.com

M.T.A. S.p.A.

Viale Spagna, 8 - ZI
35020 Tribano (PD) - Italy
Tel. +39 049 9588611
Fax +39 049 9588612
info@mta-it.com



Cooling, conditioning, purifying.



MTA is ISO9001 certified, a sign of its commitment to complete customer satisfaction.



MTA products comply with European safety directives, as recognised by the CE symbol.